

Cod. 10760


Pivot
Pivot



E-Border

End gun for pivots equipped with GPS
and 4G communication module

*Cañon final de pivot con GPS
y comunicación 4G*

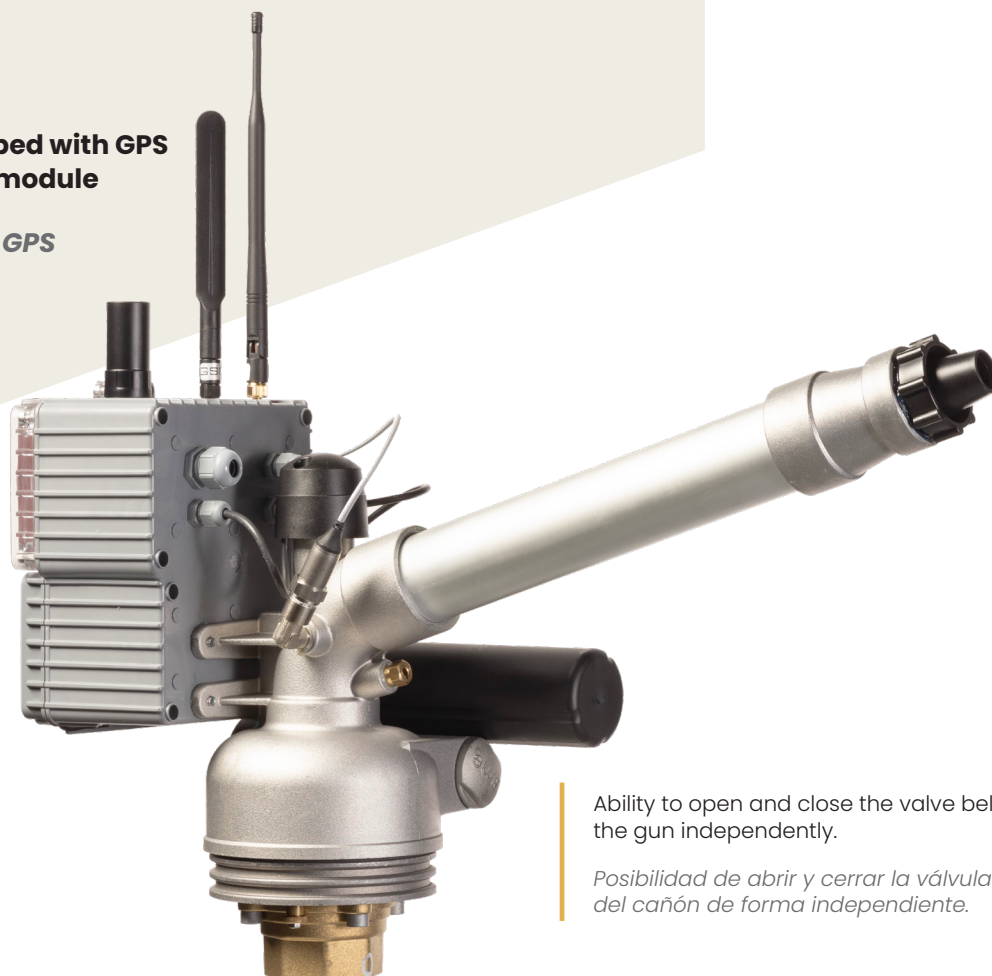

Ability to open and close the valve below
the gun independently.

*Posibilidad de abrir y cerrar la válvula debajo
del cañón de forma independiente.*

Net weight
Peso neto
7,8 kg

Connection
Conexión
2" F

Size
Dimensiones
ø 860 mm x 400 mm

Nozzle
Boquilla
Ø 10 ÷ 28 mm

Angle
Ángulo
18°

Pressure *Presion*

for **US units** go to next page

	2 bar		3 bar		4 bar		5 bar	
Nozzle <i>Boquilla</i>	Flow <i>Caudal</i> l/min	Radius <i>Alcance</i> m	Flow <i>Caudal</i> l/min	Radius <i>Alcance</i> m	Flow <i>Caudal</i> l/min	Radius <i>Alcance</i> m	Flow <i>Caudal</i> l/min	Radius <i>Alcance</i> m
10 mm - 5 mm	110	21	134	23	156	26	175	28,5
12 mm - 5 mm	149	23	182	26	211	29	236	32
14 mm - 5 mm	196	25	239	27,5	277	30,5	309	33,5
16 mm - 5 mm	248	26	303	29,5	352	33	391	36,5
18 mm - 5 mm	-	-	377	33	436	36	487	40
20 mm - 5 mm	-	-	459	35	533	38,5	594	42,5
22 mm - 5 mm	-	-	549	36	636	40,5	711	44,5
24 mm - 5 mm	-	-	650	38	752	42	841	46,5



Pressure Presion

E-Border	29 PSI		44 PSI		58 PSI		72 PSI	
	Flow Caudal gpm	Radius Alcance feet	Flow Caudal gpm	Radius Alcance feet	Flow Caudal gpm	Radius Alcance feet	Flow Caudal gpm	Radius Alcance feet
Nozzle Boquilla								
0.39 in - 0.20 in	29.1	69	35.4	75	41.2	85	46.2	94
0.47 in - 0.20 in	39.4	75	48.1	85	55.7	95	62.3	105
0.55 in - 0.20 in	51.8	82	63.1	90	73.2	100	81.6	110
0.63 in - 0.20 in	65.5	85	80.0	97	93.0	108	103.3	120
0.71 in - 0.20 in	-	-	99.6	108	115.2	118	128.7	131
0.79 in - 0.20 in	-	-	121.3	115	140.8	126	156.9	139
0.87 in - 0.20 in	-	-	145.0	118	168.0	133	187.8	146
0.94 in - 0.20 in	-	-	171.7	125	198.7	138	222.2	153